

**SPECIFIC USES:**

- 1 MARINE EQUIPMENT
- 1 UNDERCOATING
- 1 STORAGE OF TOOLS AND DRILLS
- 1 FARM AND ROAD MACHINERY
- 1 FINISHED OR FABRICATED CASTINGS
- 1 VALVES
- 1 STAMPINGS

*Complies with MIL-C-16173D-Grade 4 and MIL-C-83933A*

**DESCRIPTION:**

PROTECTO FLEX is a long term, flexible, non-tacky, dust-resistant coating that will not crack, peel, flake or check over a wide temperature range (-40° F to 175° F).

PROTECTO FLEX leaves a translucent film that allows protected parts to be seen.

PROTECTO FLEX can be flushed off easily with mineral spirits whereas other coatings are difficult to remove and usually require special solvents.

**DIRECTIONS:**

Make sure surface is clean and dry. Apply a thin uniform coating. Allow approximately 5 minutes to set up. For more severe storage conditions, a second coating can be applied within a few minutes. Complete setting of protective coating takes approximately two hours after applying.



# PROTECTO FLEX™

## Metal Parts Protector

- ◆ LONG TERM CORROSION PREVENTATIVE
- ◆ FLEXIBLE DUST RETARDANT COATING

*See through film allows parts to be identified*

**HARMFUL IF SWALLOWED**

**KEEP OUT OF REACH OF CHILDREN.**

For industrial and institutional use only.  
See right panel for additional cautions and First Aid statements.

To Reorder:  
**WECHEM, INC.**

5734 Susitna Drive Harahan, LA 70123

(504) 733-1152 \* 1-800-426-0512

FAX: (504) 733-2218 \* [www.wechem.com](http://www.wechem.com)

**UNIT OF MEASURE: U.S. GALLONS**

7/00

**CAUTION:**

Use only in well-ventilated area. Avoid contact with eyes or prolonged contact with skin. Do not expose to heat or store at temperatures above 120° F.

**FIRST AID:**

**EYES:** Flush with large amounts of cool running water for at least 15 minutes while holding upper and lower lids open. If irritation persists get medical attention immediately.

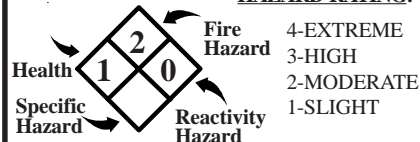
**SKIN:** Wash with soap and water. If irritation persists, seek medical attention.

**INHALATION:** Remove to fresh air. Seek medical attention immediately. If breathing stops give artificial respiration.

**INGESTION:** DO NOT INDUCE VOMITING. Seek medical attention immediately.

**CONTAINS:**

Aliphatic Petroleum Distillates .....	CAS# 64742-48-9
Aliphatic Hydrocarbon .....	8052-41-3

**NFPA****HAZARD RATING:**

READ MATERIAL SAFETY DATA SHEET BEFORE USE