

QC LUBE is a one-step cleaner and lubricant, that penetrates to coat contacts and provide corrosion protection on switchgear blade mechanisms. **QC LUBE** includes High Purity Solvents for cleaning and a special grade silicone for lubricating. Removes grease, dirt, oil and operating erosion from all electro-mechanical devices. Safe for use on metering, distribution and substation class switchgear contacts, including URD and OVH applications.

QC LUBE protects against atmospheric contaminant buildup that can cause sticking blades or contacts, and does not degrade seals, gaskets, and most plastic insulators making it safe for use on most rubber and plastics. Another added benefit of **QC LUBE** is that it is temperature resistant. **QC LUBE** will not harden, dry, freeze or melt due to temperature fluctuations.


DIRECTIONS

Thoroughly clean the surface to be sprayed with **QC LUBE**. Spray a light film with a sweeping motion. When used on sticking surfaces, work object back and forth. Spray again if necessary.

NOTE: Product may harm some plastics. **TEST BEFORE USING.**

QC LUBE™

High Voltage Switchgear Cleaner & Lubricant

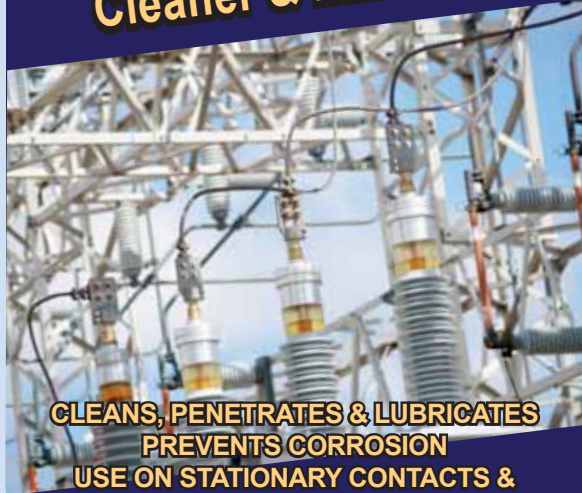

**CLEANS, PENETRATES & LUBRICATES
PREVENTS CORROSION
USE ON STATIONARY CONTACTS &
TERMINALS**

**30,000 VOLT DIELECTRIC STRENGTH
PER (ASTM D877)
NON-FLAMMABLE**

**CAUTION
CONTENTS UNDER PRESSURE.
KEEP OUT OF REACH OF CHILDREN
FOR INDUSTRIAL AND INSTITUTIONAL USE ONLY.**

(SEE RIGHT PANEL FOR ADDITIONAL CAUTIONS AND FIRST AID STATEMENTS.)

Net Wt. 10 Oz. (284 grams)

1/11

**CAUTION
MAY BE HARMFUL IF SWALLOWED.**

FIRST AID

EYES: Flush eyes with water for at least 15 minutes, removing contacts, if present, after 5 minutes. If irritation persists, seek immediate medical assistance.

SKIN: Wash with soap and water. If irritation persists seek medical attention.

INHALATION: Remove to fresh air. Seek immediate medical attention. If breathing stops give artificial respiration.

INGESTION: Do not induce vomiting. Seek immediate medical attention.

STORAGE AND DISPOSAL

Avoid contamination of food and feedstuffs. Store in a cool, dry area away from heat or open flame. Do not store at temperatures above 120°F. Do not puncture or incinerate container!

CONTAINS	CAS#
TRANS-1,2-Dichloroethylene.....	156-60-5
1,1,1,3,3-Pentafluorobutane.....	406-58-6
1,1,1,2,2,3,4,5,5,5-Decafluoropentane.....	138495-42-8
1,1,1,2 Tetrafluoroethane.....	811-97-2

*Acceptable Exposure Limit (AEL) established by manufacturer.

NFPA Health Specific Hazard		HAZARD RATING: 4-EXTREME 3-HIGH 2-MODERATE 1-SLIGHT

READ MATERIAL SAFETY DATA SHEET BEFORE USE.



Wechem, Inc.
5734 Susitna Dr • Harahan, LA 70123
(504) 733-1152 • 800-426-0512
FAX (504) 733-2218 • WWW.WECHEM.COM

